


Unifire *OUTPUT*



Pistol grip

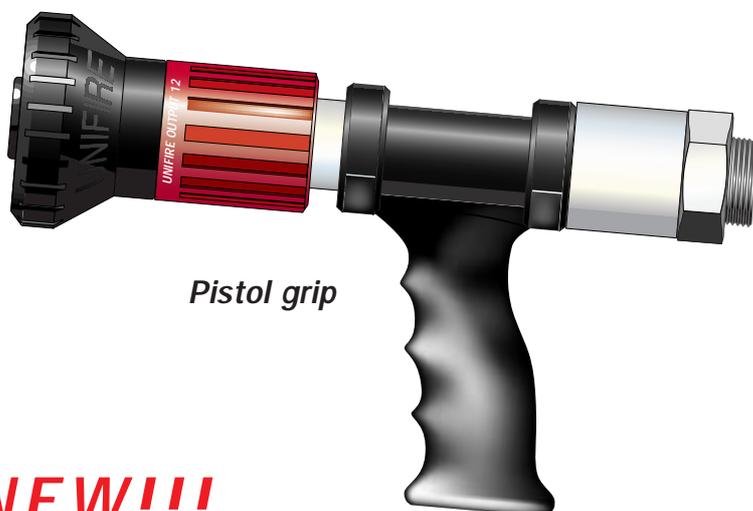

Straight model



Attachable foampipes

NEW!!!

UNIFIRE OUTPUT - New Professional firefighting nozzle that puts safety of the operator in focus. Generate a wide, full and effective protecting fogscreen immediately when opened. A minimum of moving parts means maximum reliability. Well suited for ACTION-technique extinguishing. Moving parts are not affected by the waterpressure.

Available models

Supplied with ergonomical pistolgrip and swivelling connection. Also available as straight version. Flowcapacities 12, 14 or 16 mm. Excellent for non-aspirating foam applications or low and medium expansion foam with attachable foampipe

Operation

Twist the nozzle head to open. Generates a wide, full fogscreen. 3/4 of a turn from shut to jet position.

Operating pressure

Recommended operating pressure 3-15 bar
Max operating pressure 20 bar

Weight and measurements

Weight: 2,6 kg pistolgrip, 1" swivelling connection
Length with 1" threads: 310 mm,
Handle length: 120 mm
Rubber head Ø : 83 mm

Connections

1" or 2" BSP male threads

Material

Brass, stainless steel, solid rubber bumper and handle.

Capacities 12 mm version*

Pressure (Bar)	Fog 100°		Jet	
	Flow (lpm)	Range (m)	Flow (lpm)	Range (m)
6	220	10	220	30
10	285	12	285	33

Capacities 14 mm version*

Pressure (Bar)	Fog 100°		Jet	
	Flow (lpm)	Range (m)	Flow (lpm)	Range (m)
6	300	12	300	34
10	380	14	380	37

Capacities 16 mm version*

Pressure (Bar)	Fog 100°		Jet	
	Flow (lpm)	Range (m)	Flow (lpm)	Range (m)
6	410	14	410	38
10	510	18	510	42

*= approximate calculated values.