


Article No: VMU16110 / 16120

Unifire V16 Nozzle



The Unifire V-nozzle is a multi-purpose fognozzle with very good performance for both fog and jet. The V-nozzles are available in both long and short versions. The V-nozzle can be combined with an attachable foam-tube for heavy and medium foam. The V-nozzles are used on a number of Unifire products. Look for the V-nozzle logotype.

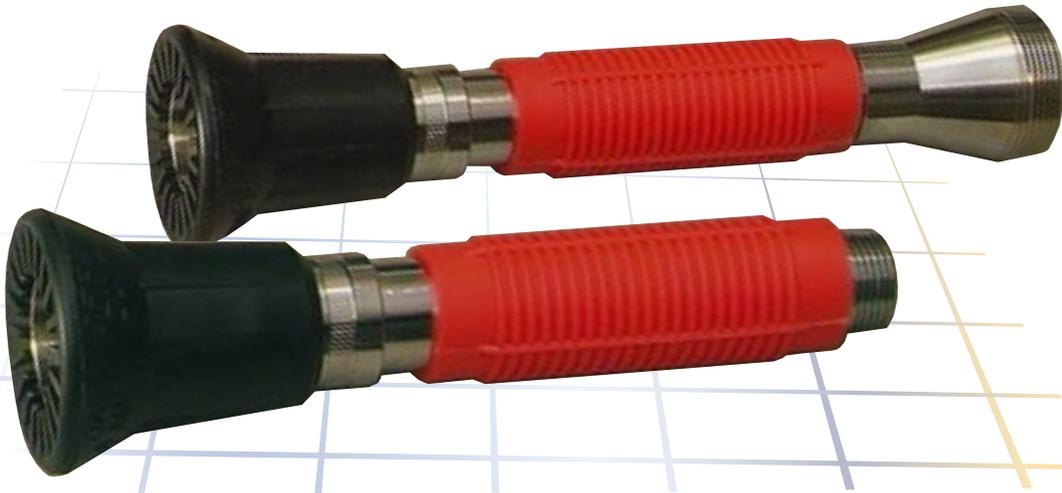

The UNIFIRE V-nozzles are available in sizes 7, 10, 12, 14, 16, 18, and 20

How to operate

Twist the nozzle head to select spray-pattern
-Stepless adjustable from shut-off via jet to 90° fog.

Applications

Fireextinguishing with fog or jet. Proven very reliable. Designed for heavy professional use.

Operating pressure

2 - 10 Bar.

Material

Chromeplated brass, red plastic cover and rubber bumper head.

Weight & Measurements (With 2" conn.)

Length: 330 mm
Nozzle Ø: 80 mm
Weight: 1.7 kgs

Connections

1" or 2" BSP Male thread. (Short version 1" female)

Maintenance / Spareparts

The nozzle is practically maintenance-free. Only spare-part is the baffle and its screw.

Approvals

Nozzle approved by: Lloyd, Det Norske Veritas, Bureau Veritas, American Bureau of Shipping e.t.c.

Capacities UNIFIRE V16 nozzle

| Pressure Bar | Jet | | Fog 90° | |
|-----------------|-------------|-----------------|-------------|-----------------|
| | Flow lpm | Range meters | Flow lpm | Range meters |
| 2 | 205 | 26 | 240 | 10 |
| 6 | 356 | 34 | 405 | 13 |
| 10 | 462 | 40 | 550 | 14 |